


INDOOR 698-2700MHz MIMO PANEL ANTENNA



Telecommunication Technology & Engineering Accessories


Rev.V1.2

Specification of 698-2700MHz Low PIM Indoor MIMO Panel Antenna:

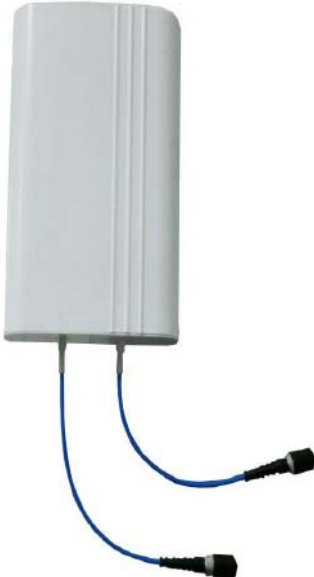Model	MOPA-727-8DBN/AF				Product Picture
Frequency Range	698~806	806~960	1710-2170	2200-2700	
Impedance	50Ω				
VSWR	≤ 2.0				
Gain	5±0.5dB	6±0.5dB	7±0.5dB	7.5±0.5dB	
Polarization	Vertical and Horizontal				
Horizontal Beamwidth	80°	80°	65°	60°	
Vertical Beamwidth	73°	70°	60°	60°	
Maximum Power	50W				
Intermodulation	-150dBc@2X33dBm				
Connector Type	2 X N/Female *				
Dimension	400×180X62mm				
Mounting Kit	On Wall				
Radome material	PVC, White Color , RAL9003				
Work Temperature	-55~+60℃				
Weight	1.20kg				

* Can be Custom made with SMA Female , 4.3/10 Female or 4.1/9.5 Female

Antenna Radiation Patterns:

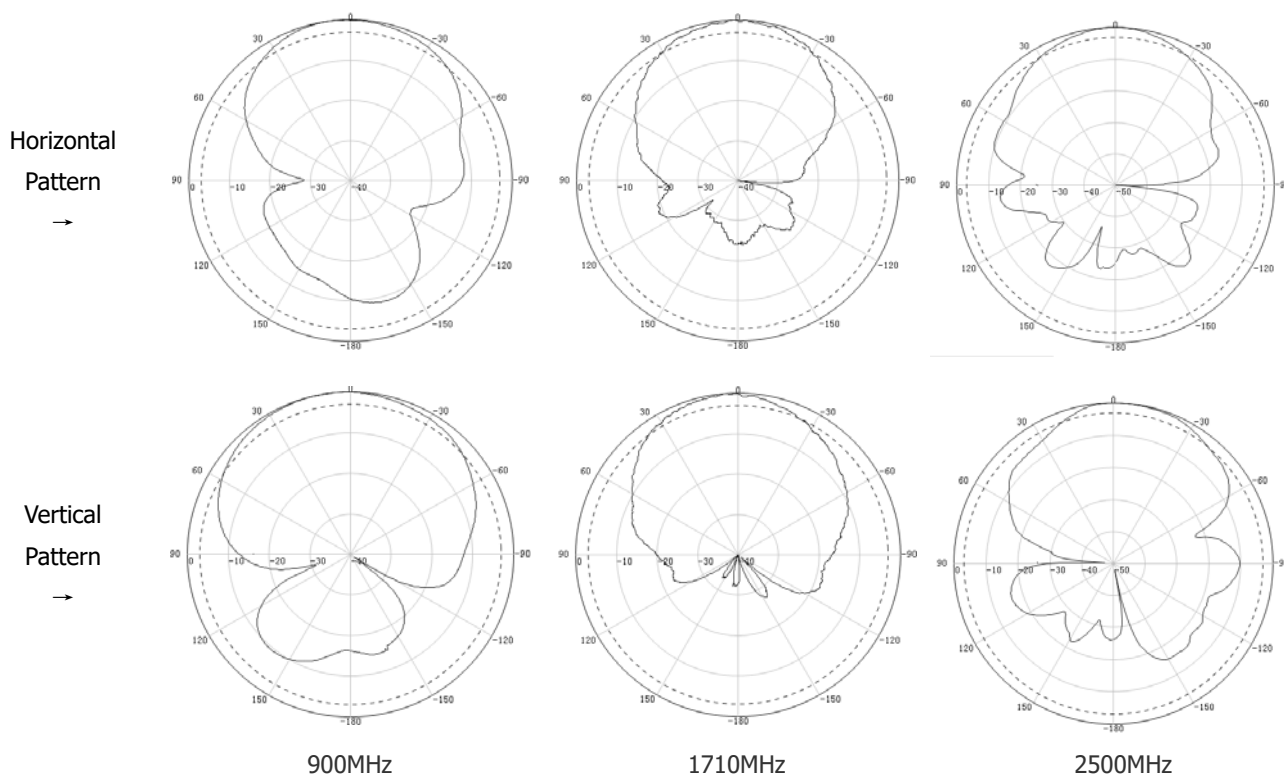

All specifications are subject to change without notice.

© 2019 JIAXING GELVO TECHNOLOGY CO.,LTD. All Rights Reserved.

Website <http://www.gelvo.com>

ADD: 253 NORTH BAICHI ROAD HAIYAN JIAXING ZHEJIANG CHINA

TEL: +86-573-86215122

FAX: +86-573-8621 5133

E-mail: sales@gelvo.com