

100W LOW PIM TERMINATION LOAD




Communications Technology & Engineering Accessories

Rev.V1.2

Specification of 100W, 4.3/10 Type Low PIM Termination Load:

Item	Specification	
Model	LPTE-100W-4G43MR	LPTE-100W-4G43FR
Power	100W	
Frequency Range	600-4000MHz(350-6000MHz)	
VSWR	≤ 1.25	
Impedance	50 Ω	
Intermodulation	$\leq -160\text{dBc}@2\text{X}43\text{dBm}$ / $\leq -165\text{dBc}@2\text{X}43\text{dBm}$ (Typical)	
Connector Type	4.3-10/Male	4.3-10/Female
Body Color	Black	
Radiator	Aluminum	
Temperature	-35°C - $+50^{\circ}\text{C}$	
Annotation	Indoor Use,IP65	

Product Drawing:

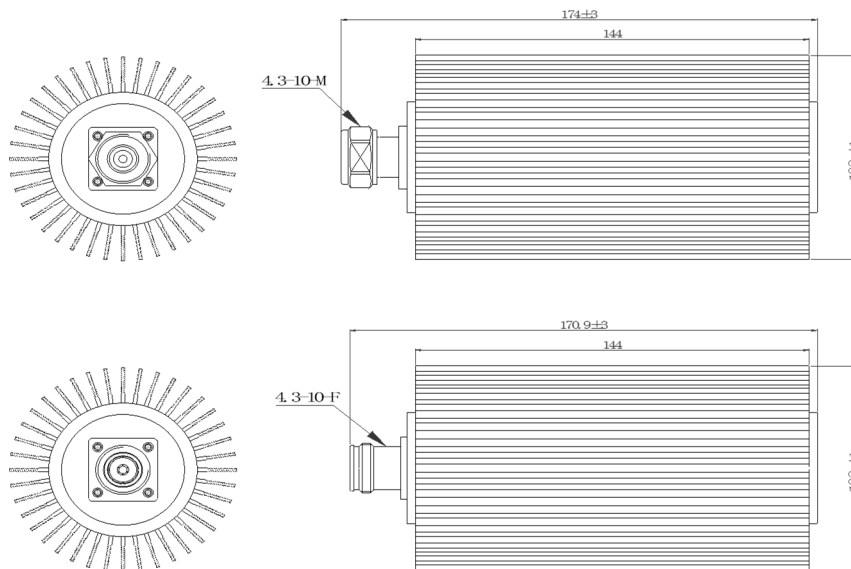

Note: The picture and the specification are just for reference. Be subject to the actual products if anything different or updated, Please pardon for without notice.



All specifications are subject to change without notice.

©2019 JIAXING GELVO TECHNOLOGY CO.,LTD. All Rights Reserved.

Website <http://www.gelvo.com>

ADD: 253 NORTH BAICHI ROAD HAIYAN JIAXING ZHEJIANG CHINA

TEL:+86-573-86215122

FAX:+86-573-8621 5133

E-mail: sales@gelvo.com