

50W LOW PIM TERMINATION LOAD



Telecommunication Technology & Engineering Accessories


Rev.V1.3

Specification of 50W, 7/16(DIN) Type Low PIM Termination Load:

Item	Specification	
Model	LPTE-50W-3GDM/R	LPTE-50W-3GDF/R
Power	50W	
Frequency Range	698-2700MHz (30-3000MHz)	
VSWR	≤ 1.15	
Impedance	50 Ω	
Intermodulation	-160dBc@2X43dBm / -168dBc@2X43dBm (Typical)	
Connector Type	7/16(DIN)-Male *	7/16(DIN)-Female *
Body Color	Black	
Radiator	Aluminum	
Temperature	-35℃ - +50℃	
Annotation	Indoor Use	

* Can be custom made with 4.1/9.5 or 4.3/10 connector

Product Drawing

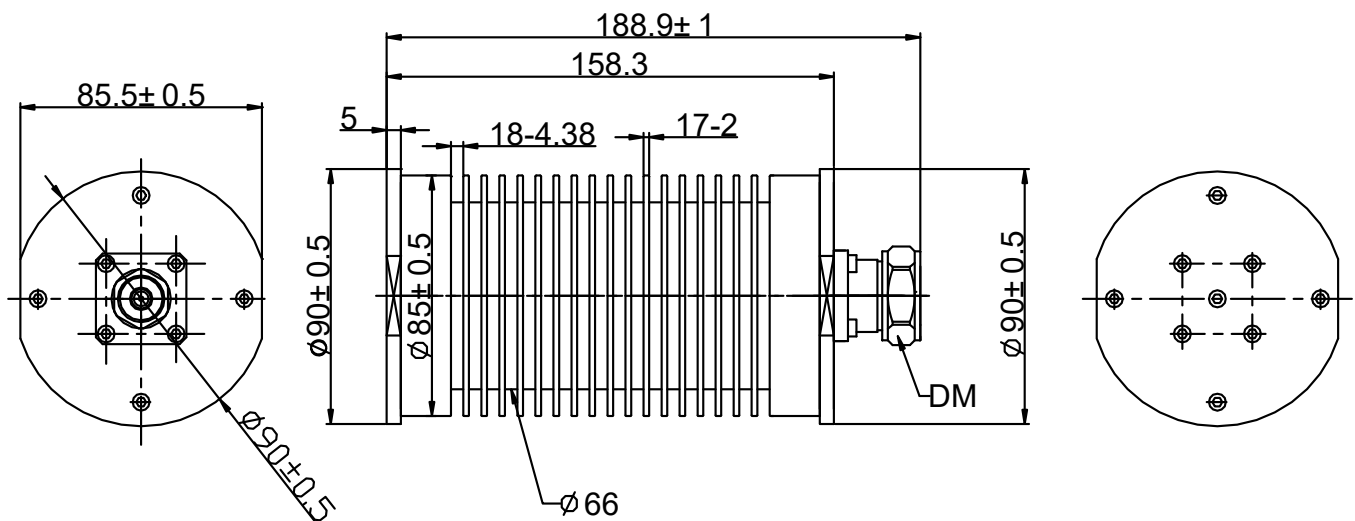

Note: The picture and the specification are just for reference. Be subject to the actual products if anything different or updated, Please pardon for without notice.

