

50W LOW PIM TERMINATION LOAD




Telecommunication Technology & Engineering Accessories

Rev.V1.1

Specification of 50W, N Type Low PIM Termination Load:

Item	Specification	
Model	LPTE-50W-3GNM/R	LPTE-50W-3GNF/R
Power	50W	
Frequency Range	698-2700MHz (30-3000MHz)	
VSWR	≤ 1.15	
Impedance	50 Ω	
Intermodulation	-160dBc@2X43dBm / -168dBc@2X43dBm (Typical)	
Connector Type	N-Male	N-Female
Body Color	Black	
Radiator	Aluminum	
Temperature	-35℃ - +50℃	
Annotation	Indoor Use	

Product Drawing

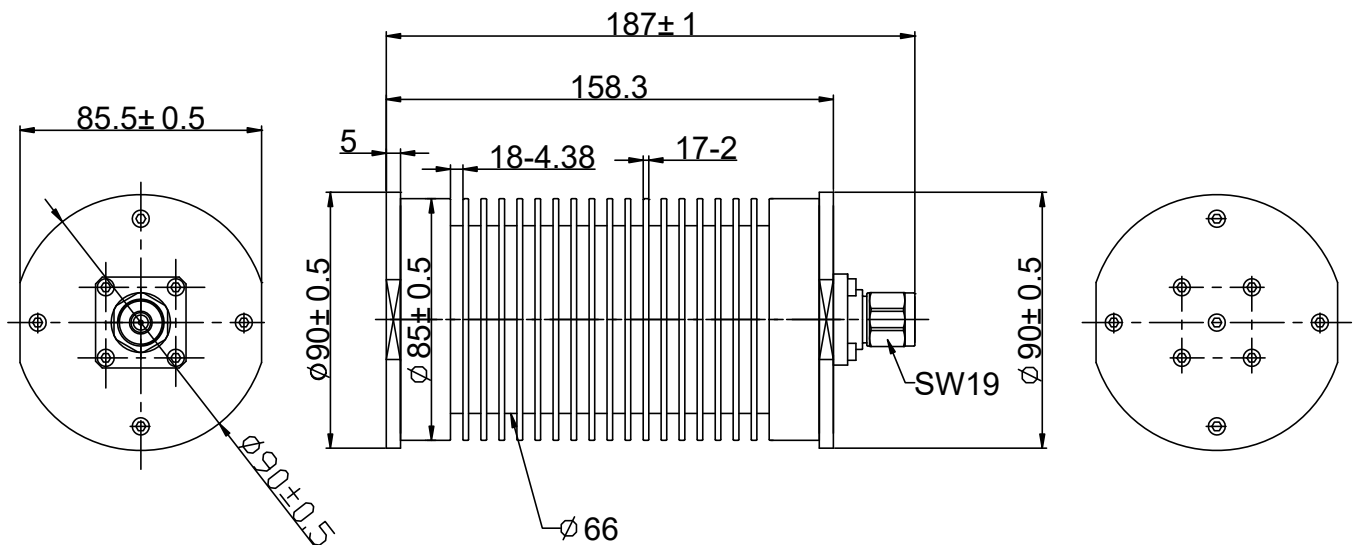

Note: The picture and the specification are just for reference. Be subject to the actual products if anything different or updated, Please pardon for without notice.

