



SPECIFICATION OF 50/100W 7/16(DIN) TYPE LOW PIM TERMINATION LOAD
GELVO TELECOM RF MICROWAVE DEPT.

日期:2012.02

审核: *Lg. Tang*


50/100W 7/16(DIN)型低互调负载规格书:

Specification of 50/100W 7/16(DIN) Type Low PIM Termination Load:

Item	Specification			
Model	LPTE-50W-3GDM/R	LPTE-50W-3GDF/R	LPTE-100W-3GDM/R	LPTE-100W-3GDF/R
Power	50W	50W	100W	100W
Frequency Range	30-3000MHz			
VSWR	≤ 1.15			
Impedance	50 Ω			
Intermodulation	-160dBc@2X43dBm / -168dBc@2X43dBm (Typical)			
Connector Type	7/16(DIN)-Male *	7/16(DIN)-Female *	7/16(DIN)-Male *	7/16(DIN)-Female *
Body Color	Black			
Radiator	Alumina			
Temperature	-35℃ - +50℃			
Annotation	Indoor Use			

* Can be custom made with 4.1/9.5 MINI DIN or 4.3/10 MINI DIN connector

Product Drawing

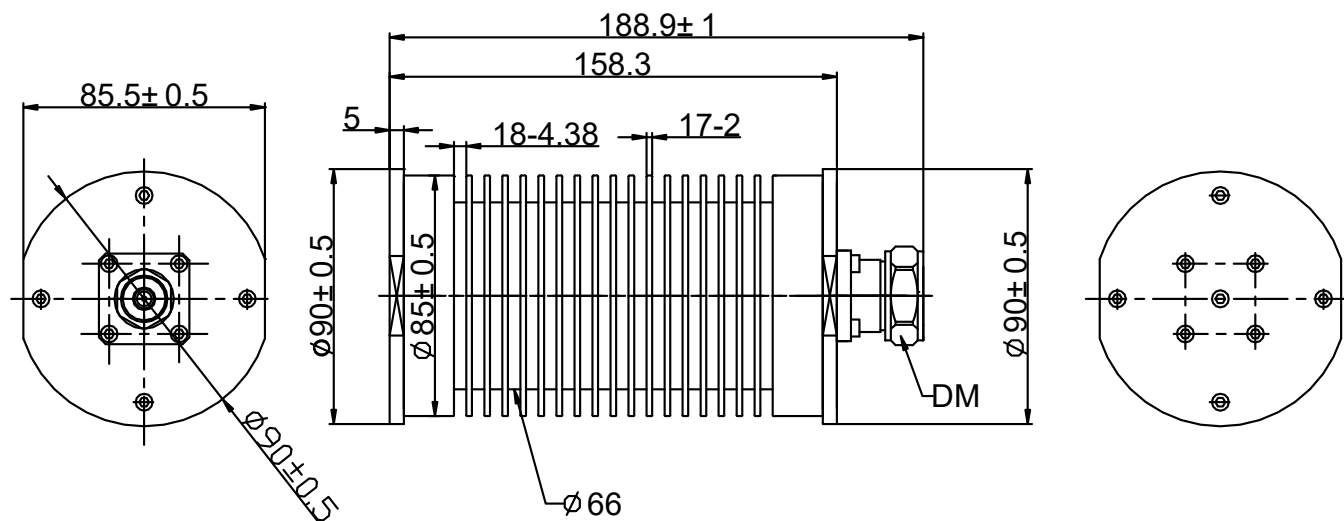

Note: The picture and the specification are just for reference. Be subject to the actual products if anything different or updated, Please pardon for without notice.

